



Working range

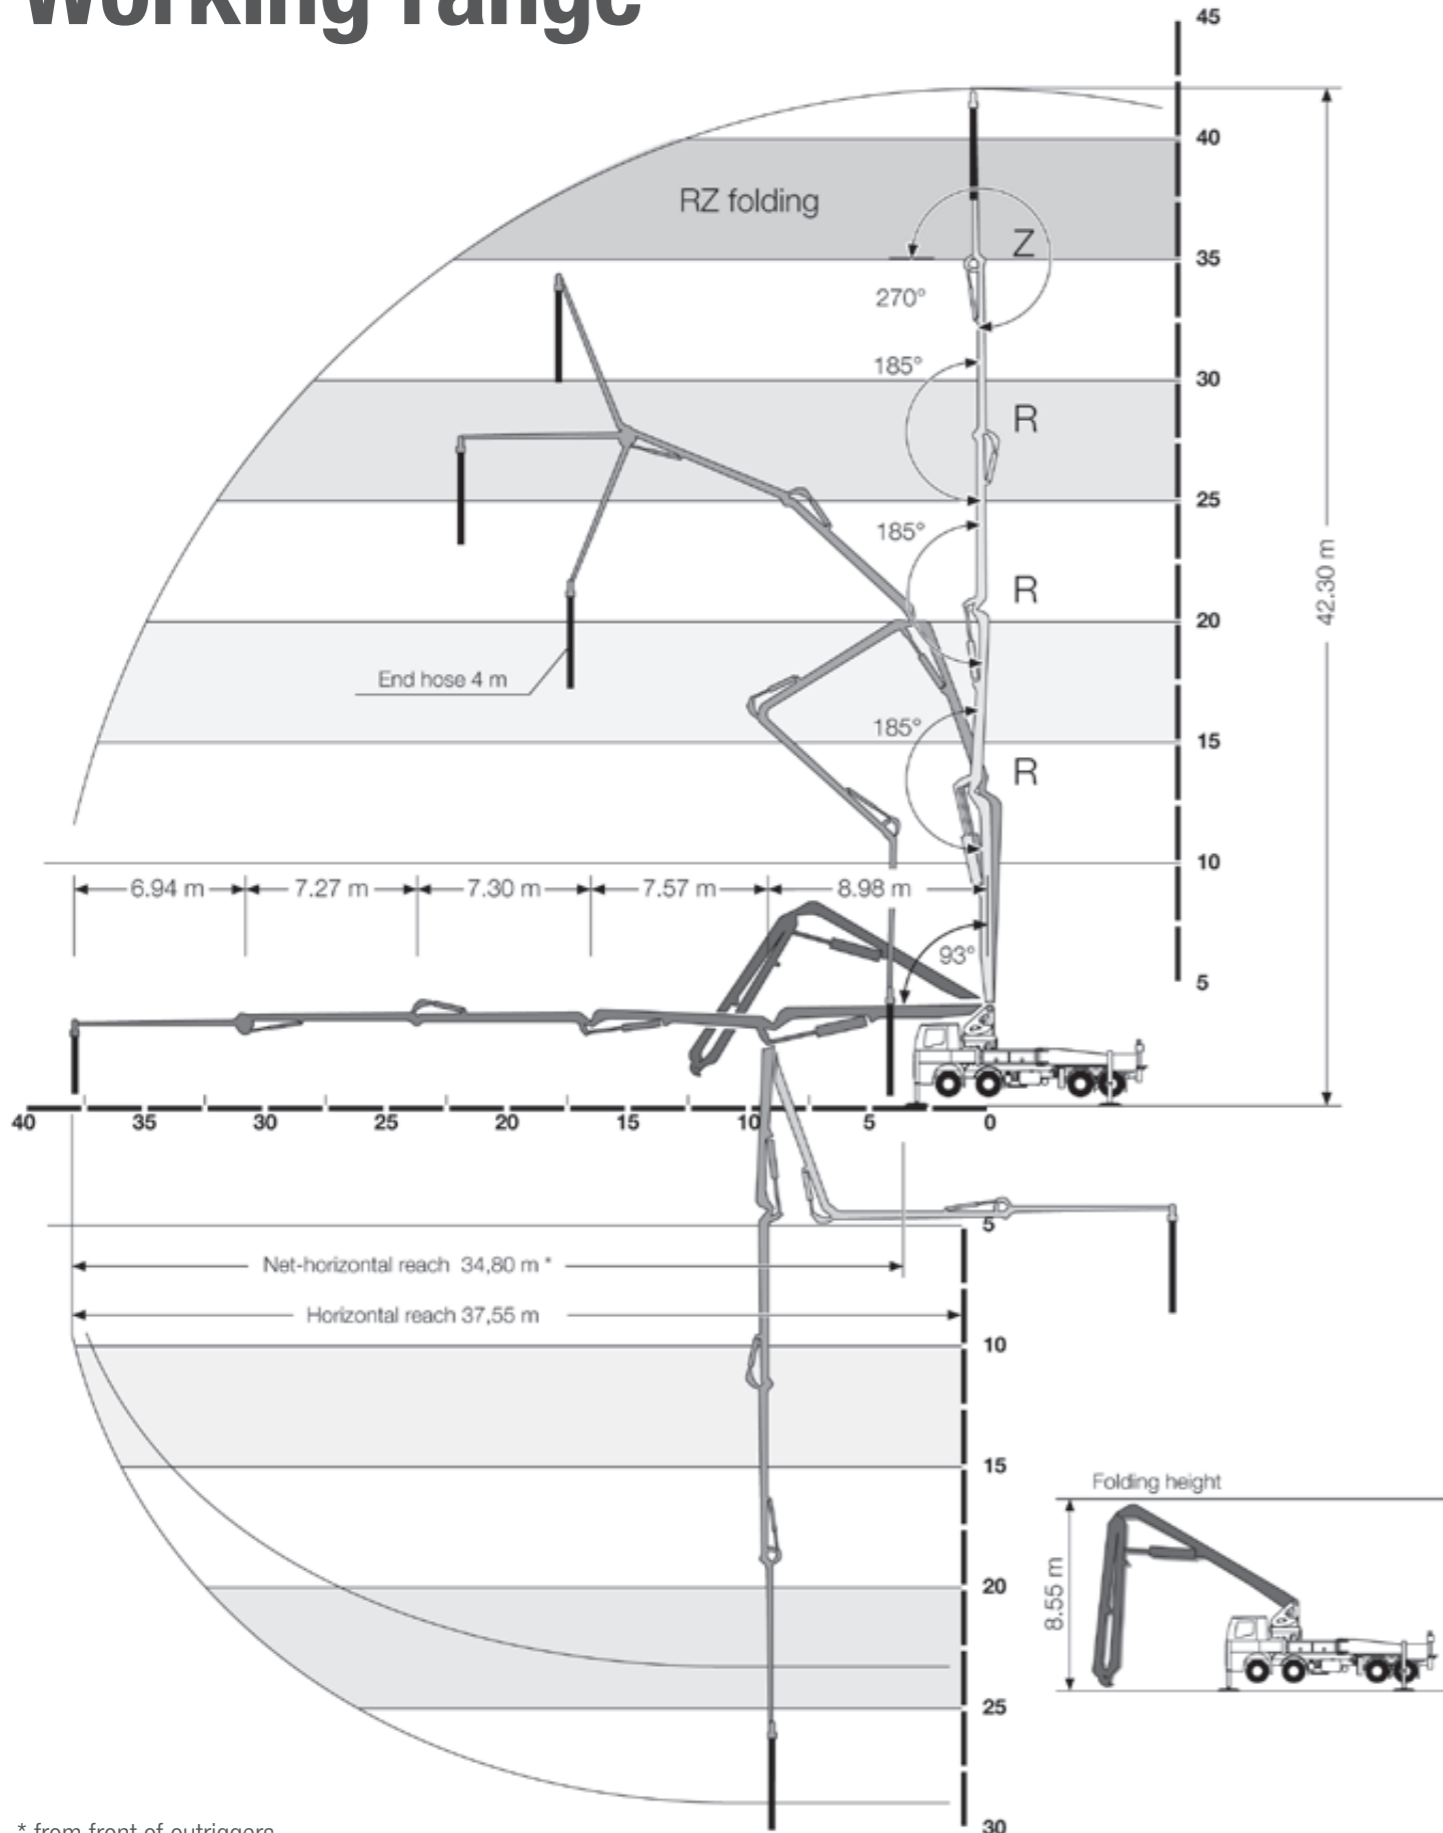

* from front of outriggers

Technical data

Performance				
Pump kit		P 2023-110/75	P 2023-110/75	P 2525
Drive	l/min	535	636	636
Delivery cylinders	mm	230 x 2,000	230 x 2,000	250 x 2,500
Concrete output max.	m ³ /h	136	161	162
Pressure on concrete max.	bar	85	85	85
Stroke rate max.	1/min.	27	32	22
Concrete valve		B-ROCK	B-ROCK	B-ROCK
Hydraulic system				
Design		open system		
Hydraulic tank	l	548		
Boom				
		43 RZ		
Delivery line		DN 125		
Length of end hose	m	4.00 (Option: 1.00 m + 3.00 m)		
Vertical reach	m	42.30		
Reach depth	m	29.90		
Horizontal reach	m	37.55		
Net horizontal reach	m	34.80 (from front of outriggers)		
Number of boom sections		5		
Height of the inflexion points	m	4.24 / 13.22 / 20.79 / 28.09 / 35.36		
Slewing range		2 x 365°		
Folding height	m	8.55		
Support				
Outrigger width, front	m	7.95		
Outrigger width, rear	m	8.30		
Outrigger load, front	kN	240		
Outrigger load, rear	kN	240		
Chassis (examples*)				
		Mercedes-Benz Arocs 4140	Mercedes-Benz Arocs 4140	
Exhaust emission standard		EURO 3	EURO 5	
Axles configuration		8x4	8x4	
Wheelbase	mm	5,750	5,750	
Length	mm	11,797	11,797	
Miscellaneous				
Water tank	l	610		
Operating weight	t	< 32		

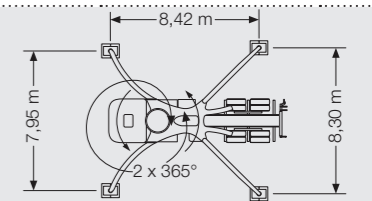

* other chassis possible